
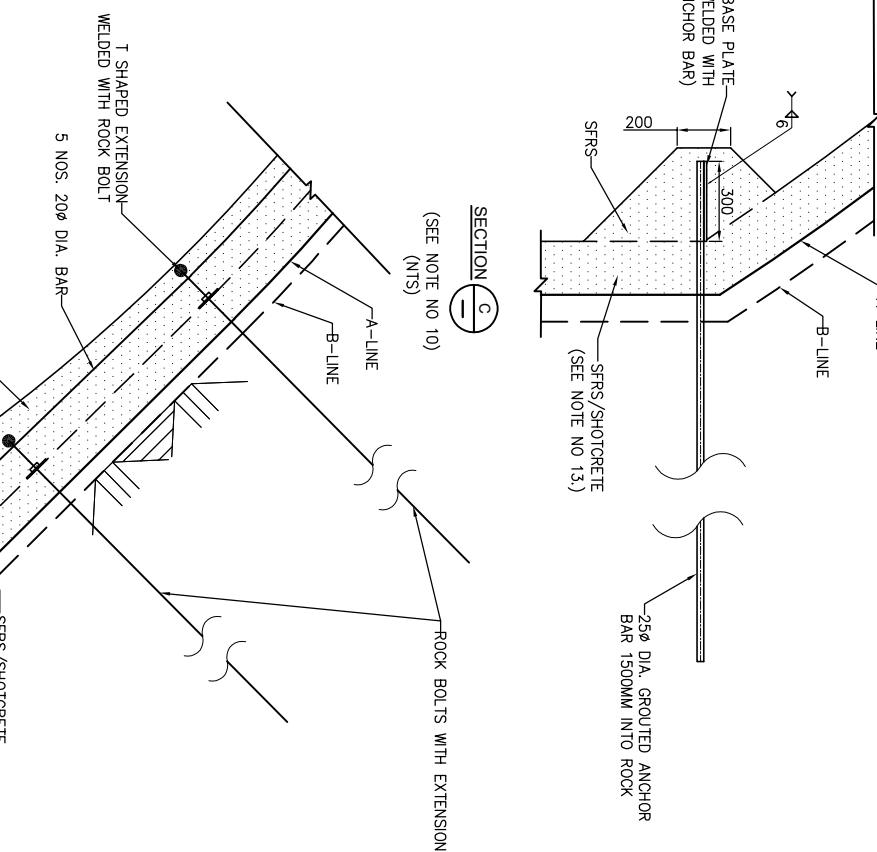
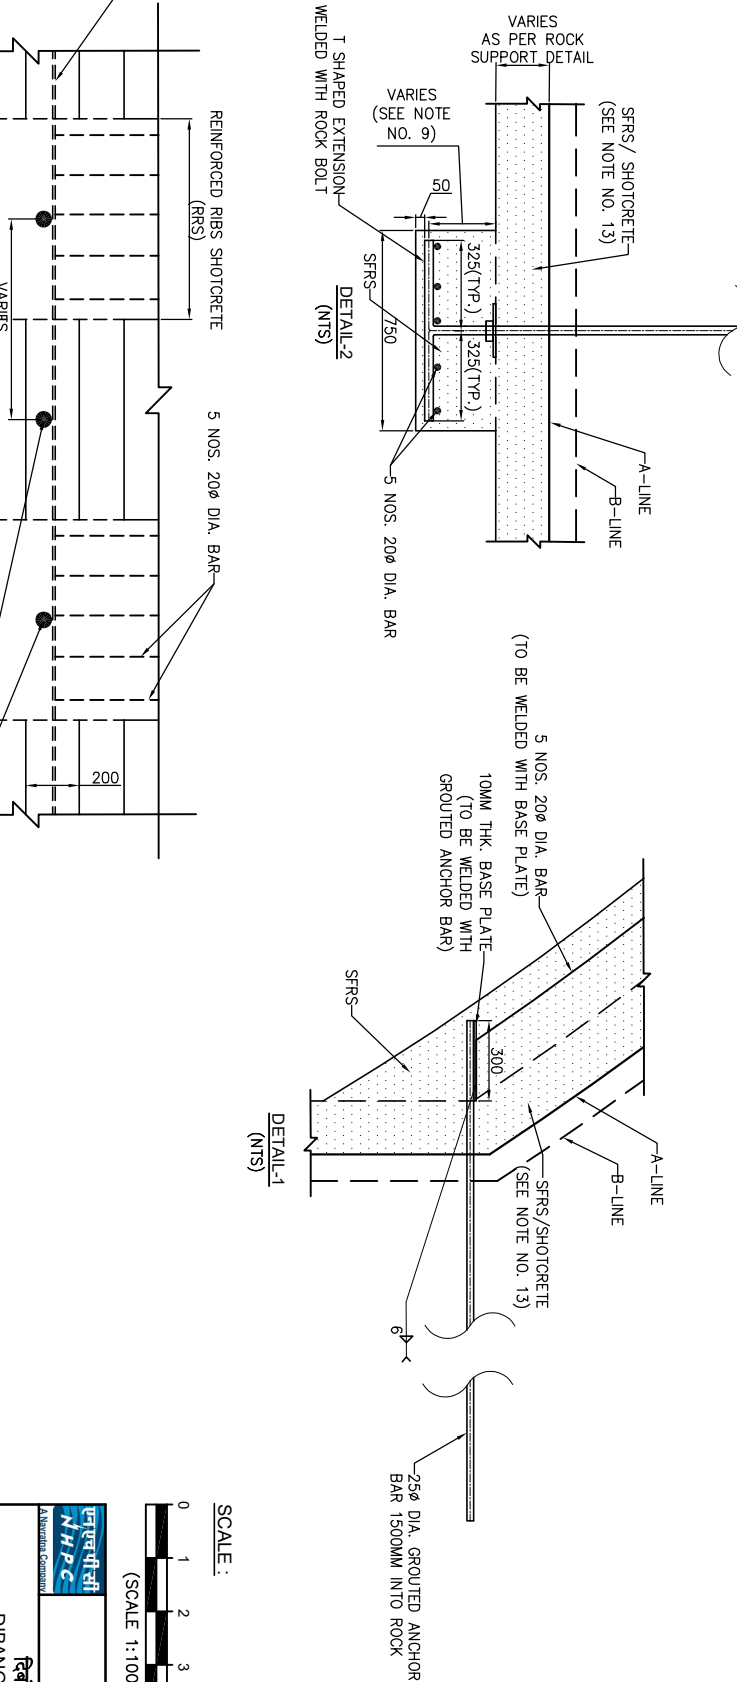


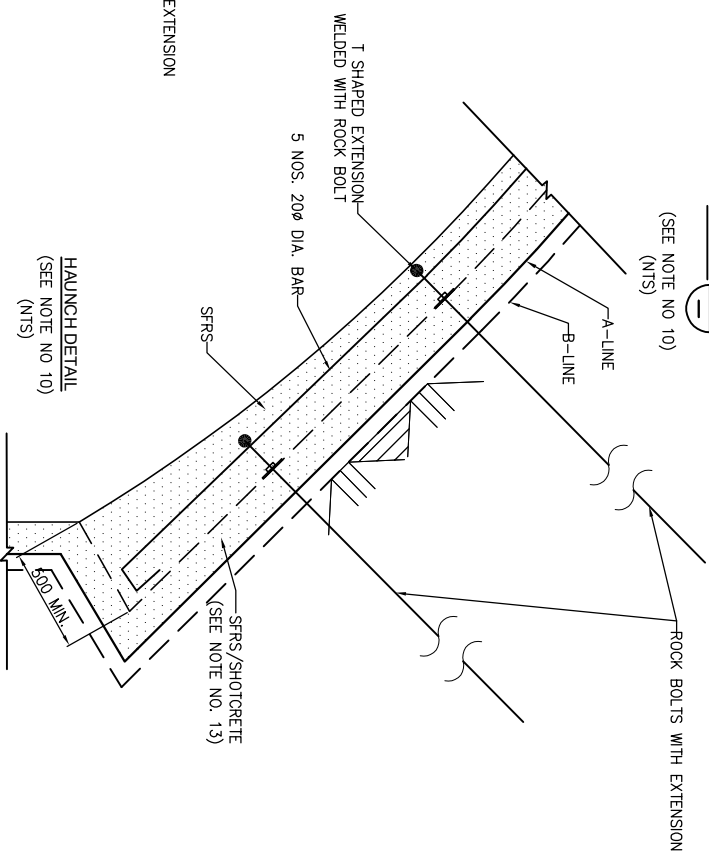

1. सभी माप (मिमी/मीटर) में तथा उन्नति और गिराव में (दिए गए हैं)।
2. ALL DIMENSIONS ARE IN MILLIMETERS AND LEVELS IN METERS.
3. THE DEFINITION OF 'A' & 'B' LINE AND VARIOUS CLASSES OF EXCAVATION SHOWN SHALL BE AS PER SECTION B.3 OF TECHNICAL SPECIFICATION.
4. ALL REINFORCEMENT SHALL BE HYSD BARS OF GRADE/NO. Fe 500 CONFORMING TO IS 1786-1983 AND SECTION B.11 OF TECHNICAL SPECIFICATIONS.
5. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH THE RELEVANT DRAWINGS OF ROCK SUPPORT OR TUNNELS /ADITS/ TUNNEL EXCAVATION SHALL BE AS PER SECTION B.3 OF TECHNICAL SPECIFICATION.
6. SPACING BETWEEN REINFORCED RIBS SHOTCRETE (RRS) & POSITION OF GROUTED ANCHOR BAR SHALL BE AS PER SPACING OF ROCK BOLTS PROVIDED AT THE LOCATION.
7. RRS SHOTCRETE SHALL BE USED FOR RRS AS PER SECTION B.5 OF TECHNICAL SPECIFICATION.
8. TUNNEL/ADITS MAY BE USED AT JUNCTIONS/TRANSITIONS IN THE TUNNEL/ADITS & IN CAVERNS AS PER SITE SPECIFIC REQUIREMENT.
9. 250 DIA. GROUTED ANCHOR BARS 1500MM INTO ROCK/TECHNICAL SPECIFICATION.
10. LENGTH OF ROCK BOLT EXTENSION SHALL VARY AS PER SITE SPECIFIC REQUIREMENT.
11. RRS IN THE ALREADY EXCAVATED AREAS SHALL BE SUPPORTED AT SPRINGING LEVEL ON A STEEL PLATE WELDED TO A GROUTED ANCHOR BAR AS SHOWN IN THE DRAWING. HOWEVER FOR ALL FUTURE EXCAVATIONS, THE RRS SHALL BE SUPPORTED AT SPRINGING LEVEL AS PER THE HAUNCH DETAIL SHOWN IN THE DRAWING.
12. SPOT ANCHOR BARS MAY BE PROVIDED TO FIX THE REINFORCEMENT BARS INTO THE CROWN AS PER SITE SPECIFIC CONDITIONS.
13. IN CASE OF REQUIREMENT OF SUPPORT BELOW SPL LEVEL, PCC WALL OF THICKNESS 250MM TO 300MM M15/A40 CONCRETE MAY BE PROVIDED WITH THE APPROVAL OF ENGINEER-IN-CHARGE.
14. SHOTCRETE TYPE AND THICKNESS MAY VARY AS PER SUPPORT DETAILS SHOWN IN ISSUE/REVISION CONSTRUCTION DRAWINGS OF RESPECTIVE LOCATIONS.

[illegible]