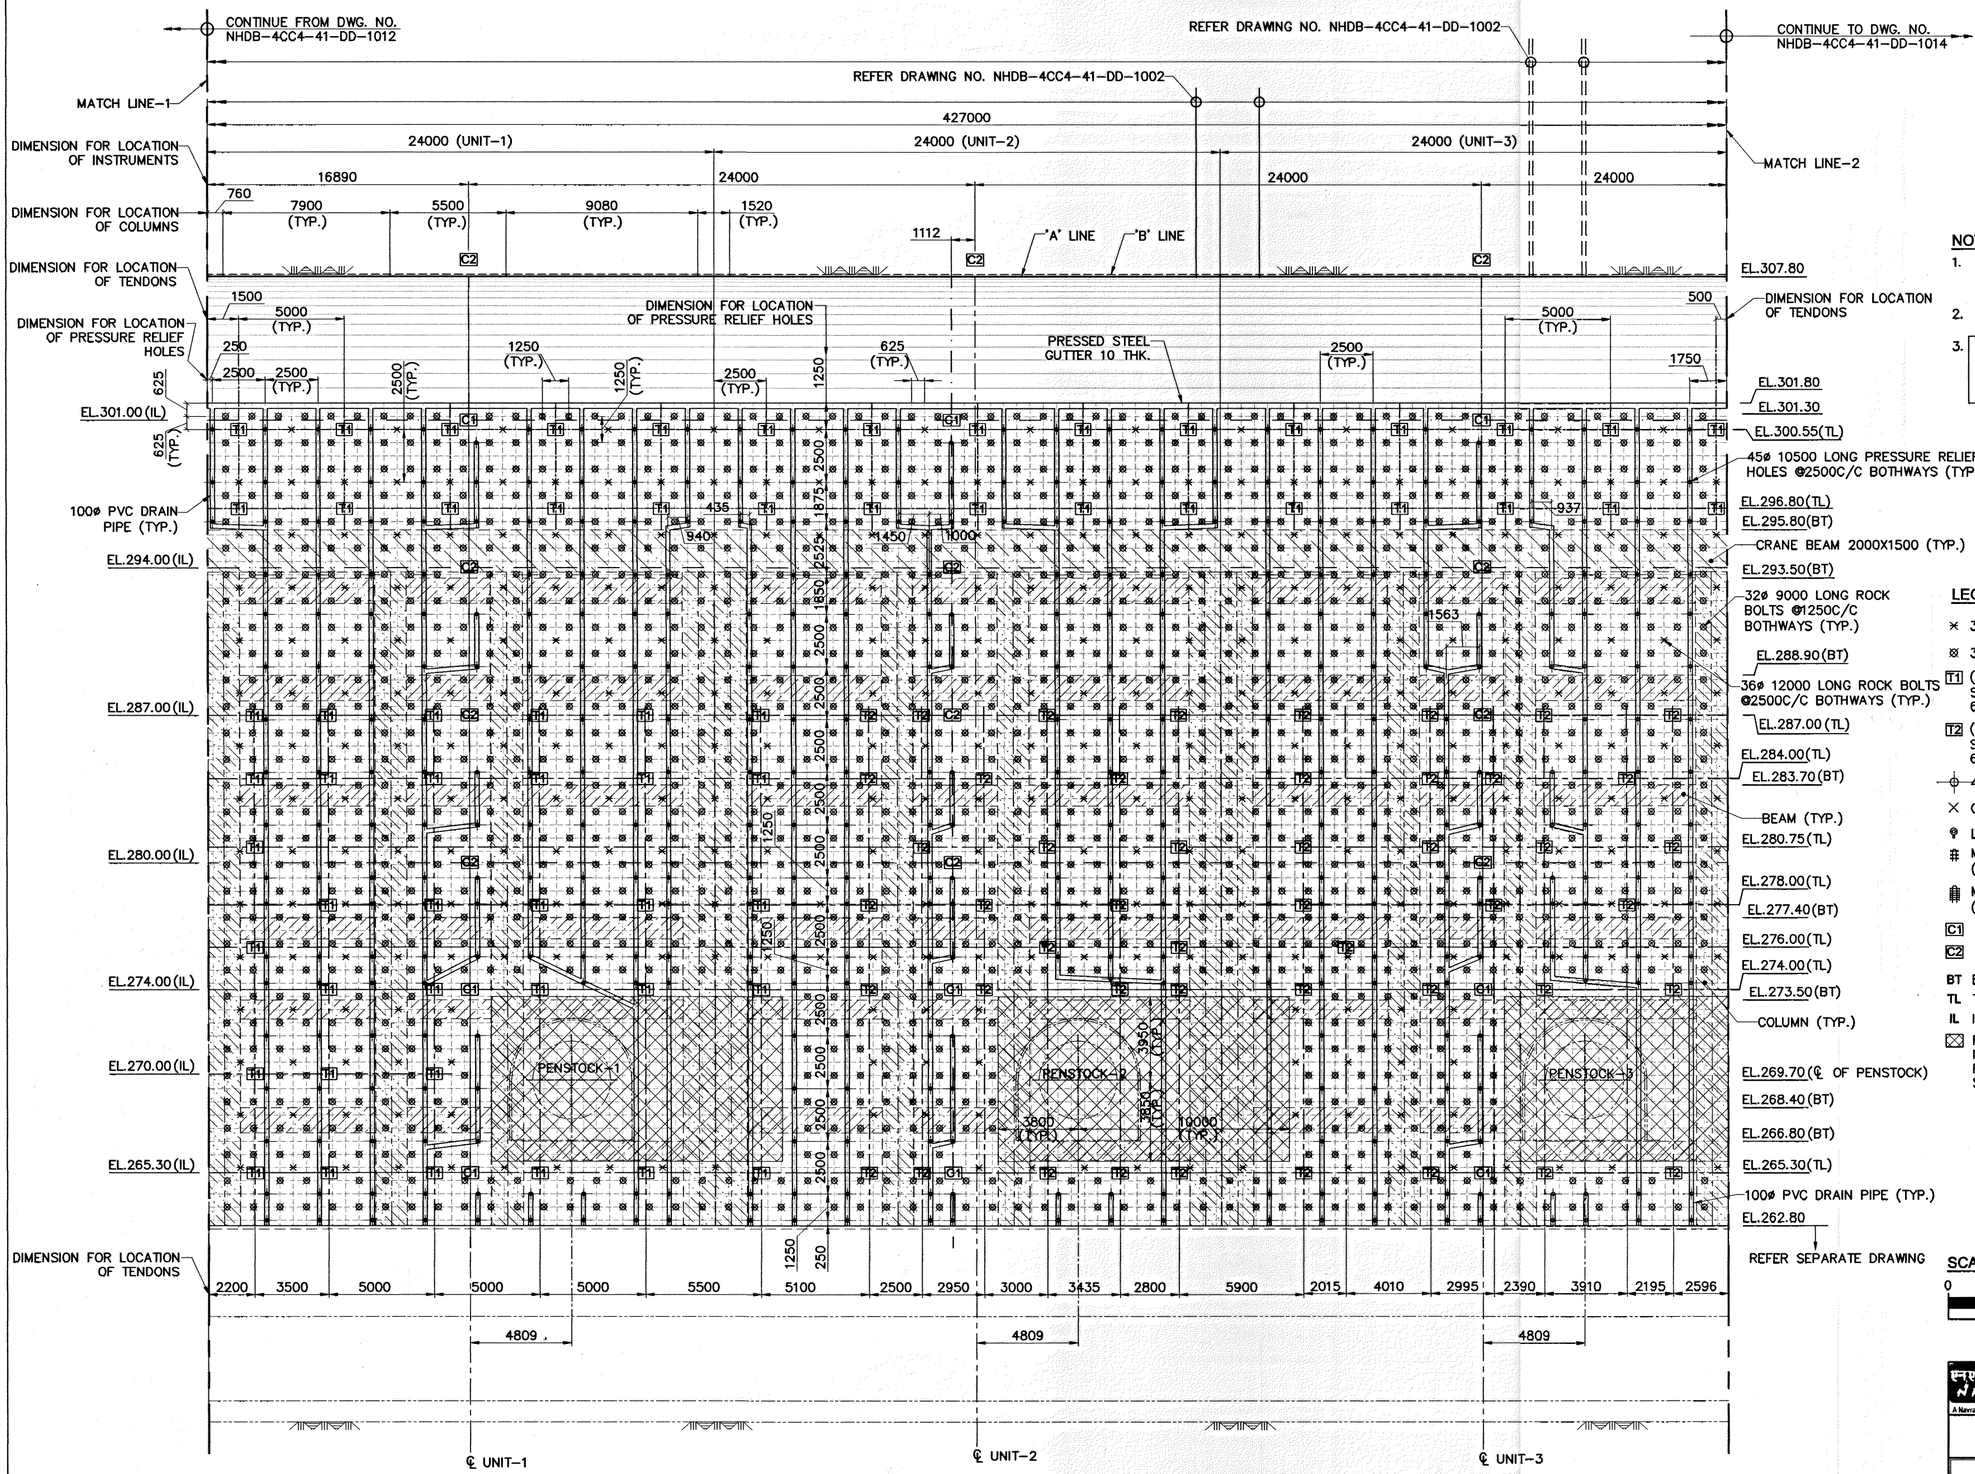


ELEVATION - UPSTREAM WALL
(TYPICAL ARRANGEMENT)

NOTES:

1. सभी माप मिलीमीटर में तथा ऊंचाई मीटर में दिए गए हैं ।
 ALL DIMENSIONS ARE IN MILLIMETRE AND ELEVATIONS ARE IN METRE.
2. FOR OTHER NOTES REFER DRAWING NO. NHDB-4CC4-41-DD-1012.
3. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH RELEVANT JUNCTION EXCAVATION DRAWING OF MAT-2/BUS DUCTS/GALLERIES/PENSTOCKS/DRAFT TUBE MANIFOLDS WITH POWER HOUSE WALL.

LEGENDS:-

- × 36ø 12000 LONG ROCK BOLTS
- ⊠ 32ø 9000 LONG ROCK BOLTS
- T1 (TYPE-1)-1200KN GUARANTEED ULTIMATE TENSILE STRENGTH (GUTS), LOCK OFF LOAD SHALL BE 60% OF GUTS, TOTAL LENGTH=30M.
- T2 (TYPE-2)-1200KN GUARANTEED ULTIMATE TENSILE STRENGTH (GUTS), LOCK OFF LOAD SHALL BE 60% OF GUTS, TOTAL LENGTH=36.75M.
- 45ø 10500 LONG PRESSURE RELIEF HOLE
- × CONVERGENCE MEASURMENT (OPTICAL TARGETS)
- LOAD CELL (30T CAPACITY)
- MULTIPLE POINT BORE HOLE EXTENSOMETER (5M, 10M, 15M) (3 POINTS)
- MULTIPLE POINT BORE HOLE EXTENSOMETER (4M, 7M, 10M, 13M, 16M, 19M) (6 POINT)
- C1 × # ⚲ (COMBINATION OF INSTRUMENTS-1)
- C2 × ▮ ⚲ (COMBINATION OF INSTRUMENTS-2)
- BT BEAM TOP LEVEL
- TL TENDONS LEVEL
- IL INSTRUMENTATION LEVEL
- ⊠ ROCK SUPPORTS AND PRESSURE RELIEF HOLES IN MARKED ZONE SHALL BE INSTALLED AS PER RELEVANT JUNCTION DRAWINGS OF INTERFACING STRUCTURE.

SCALE:

0 2.0 4.0 6.0 8.0 10.0 METRE
(SCALE= 1:200)

एनएचपीसी NHPC A Navratna Company
एन एच पी सी लिमिटेड
(भारत सरकार का एक नवरत्न उद्यम)
NHPC Limited
(A GOVT. OF INDIA NAVRATNA ENTERPRISE)

दिबांग बहुउद्देशीय परियोजना
DIBANG MULTIPURPOSE PROJECT

POWER HOUSE
ROCK SUPPORTS, CABLE TENDONS,
PRESSURE RELIEF HOLES AND INSTRUMENTATION
(EL.301.30 M TO EL.262.80 M / EL.264.90 M)
TYPICAL ARRANGEMENT
WALL ELEVATION
(SHEET 2 OF 14)

DATE	NO.	REVISION OR ISSUES	BY.	CH.	APP.
28.01.2026	00	ISSUED FOR CONSTRUCTION			

DESIGN MEMO NO.- डिजाइन मेमो संख्या

DRAWN अंकित	SUBMITTED प्रस्तुत	RECOMMENDED अनुशंसित		APPROVED अनुमोदित
DEEPAK	PRABHAT ASWAL		DEM/HM	S. CHOWDHURY

DATE दिनांक	DRG. NO. ड्रॉइंग संख्या					
JAN 2026	NHDB	4CC4	41	DD	1013	00

DRG. NO. NHDB-4CC4-41-DD-1013-00

IMS/DED/F-02 REV. NO. : 03 EFF. DATE 21.07.2016