

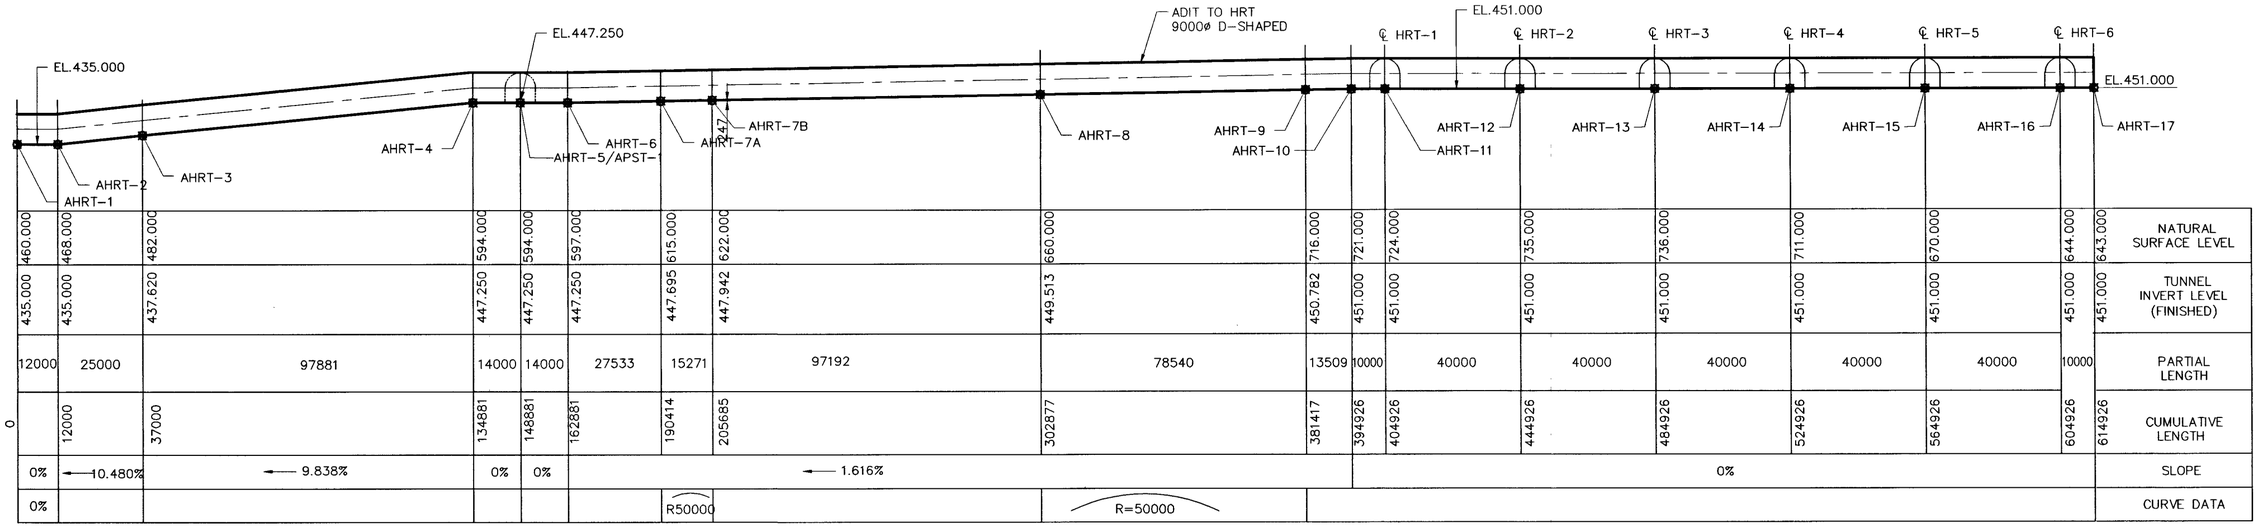



02 **LONGITUDINAL SECTION A—A**

CO-ORDINATES:- (ADIT TO HRT) 02

POINTS	NORTHING	EASTING
AHRT–1	31557.297	32053.283
AHRT–2	31562.271	32064.203
AHRT–3	31572.635	32086.955
AHRT–4	31613.196	32176.036
AHRT–5/ APST–1	31619.000	32188.776
AHRT–6	31631.719	32182.926
AHRT–7A	31656.776	32171.516
AHRT–7B	31671.414	32167.374
AHRT–C1	31677.553	32216.995
AHRT–8	31767.885	32155.568
AHRT–9	31823.606	32199.101
AHRT–C2	31773.979	32205.195
AHRT–10	31825.252	32212.510
AHRT–11	31826.471	32222.435
AHRT–12	31831.346	32262.137
AHRT–13	31836.221	32301.839
AHRT–14	31841.095	32341.541
AHRT–15	31845.970	32381.243
AHRT–16	31850.845	32420.944
AHRT–17	31852.064	32430.870
APST–2	31624.803	32201.516

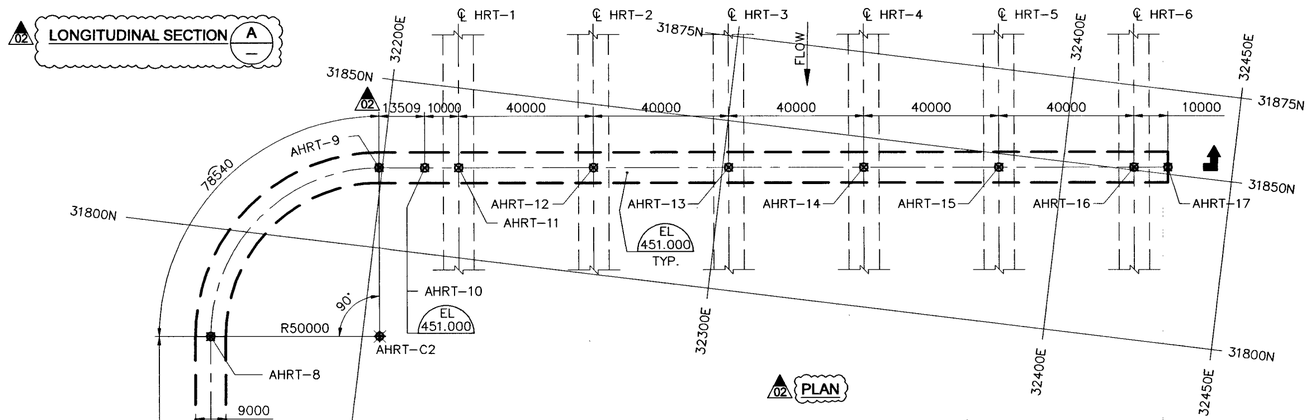

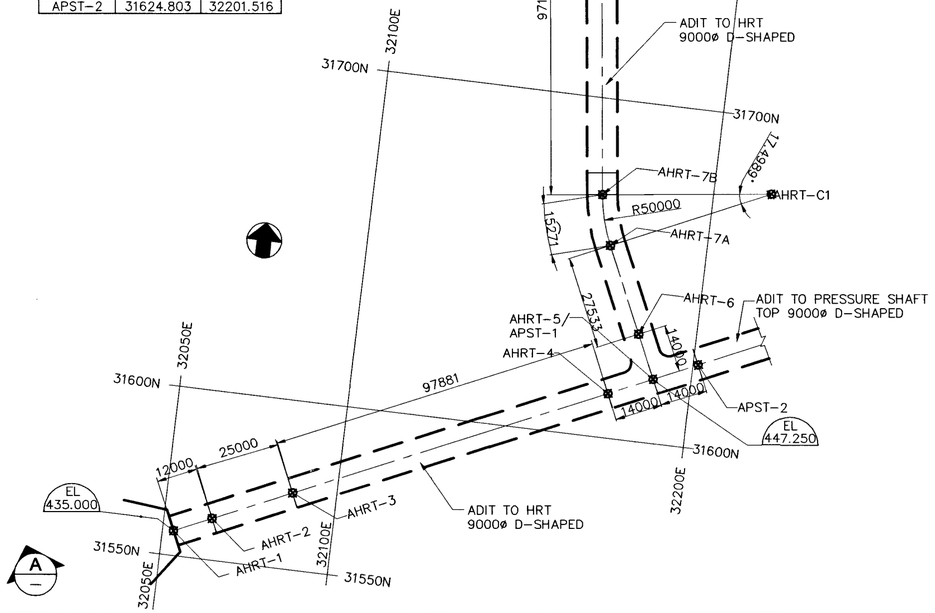

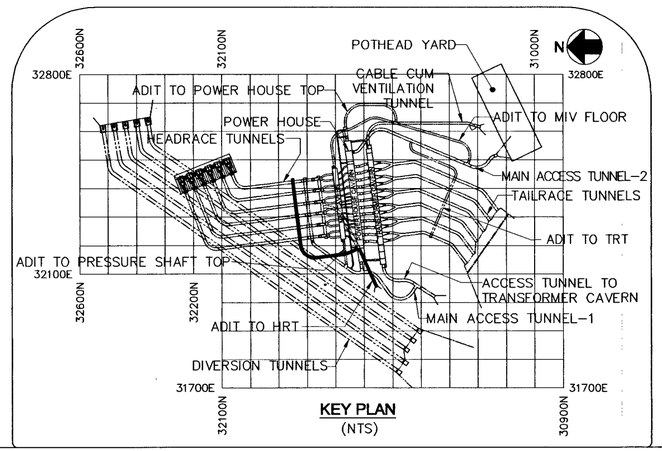

NOTES:-

1. सभी माप मिलीमीटर में, ग्रिड तथा ऊचांई मीटर में दिए गए है।
 ALL DIMENSIONS ARE IN MILLIMETRE, GRIDS AND ELEVATIONS ARE IN METRE
2. GRIDS HAVE BEEN REPRODUCED FROM S.O.I. TOPO SHEET. THE ACCURACY OF THE GRID SYSTEM SHALL BE ESTABLISHED WITH EXISTING S.O.I BENCH MARK AT SITE BEFORE ADOPTING COORDINATES.
3. THE VALUES OF NSL ARE BASED ON SURVEY PROVIDED BY PROJECT VIDE IOM NO. NH\DIBANG\DAM & INTAKE CONSTRUCTION\2024\5 DATED 19.03.2024. SAME SHALL BE VERIFIED WITH EXISTING BENCH MARKS AT SITE.
4. PORTAL LOCATION OF ADIT TO HRT HAS BEEN FIXED BASED ON THE FINDINGS OF GEOLOGICAL ASSESSMENT REPORT SENT BY PROJECT VIDE IOM NO. NH\DIBANG\GEOLOGY\2024\21 DATED 03.07.2024. THE ALIGNMENT OF ADIT TO HRT HAS BEEN FINALISED ACCORDINGLY.
5. THE LEVELS SHOWN CORRESPONDS TO THE FINISHED SURFACES/LINES. FOR LEVELS OF EXCAVATION REFER EXCAVATION DRAWING.
6. FOR EXCAVATION AND ROCK SUPPORT DETAILS REFER DRAWING NO. NHDB–3BC4–41–DD–1002 TO 1004.
7. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH DRG. NO. NHDB–1AC4–41–DD–0001 & NHDB–3KC4–41–DD–0002.

REFERENCE DRAWINGS:-

1. **NHDB-1AC4-41-DD-0001.**
2. **NHDB-3KC4-41-DD-0002.**

0 12.50 37.50 62.50 METRE

DRG. NO. NHDB-3BC4-41-DD-0001-02

एन एच पी सी लिमिटेड
(भारत सरकार का एक नवरत्नउद्यम)
NHPC Limited
(A GOVT. OF INDIA NAVRATNA ENTERPRISE)
A Navratna Company

दिबांग बहुउद्देशीय परियोजना
DIBANG MULTIPURPOSE PROJECT

DATE	NO.	REVISION OR ISSUES	BY.	CH.	APP.
04.07.2025	02	ALIGNMENT MODIFIED IN LINE WITH ADIT TO PRESSURE SHAFT TOP REVISED ALIGNMENT			
17.10.2024	01	CO-ORDINATES OF POINTS AHRT-10 TO AHRT-17 REVISED. NOTE NO.- 6 UPDATED	Sd/-	Sd/-	Sd/-
10.07.2024	00	ISSUED FOR CONSTRUCTION	Sd/-	Sd/-	Sd/-

DESIGN MEMO NO.- डिजाइन मेमो संख्या

HEAD RACE TUNNEL
ADIT TO HRT
SETTING OUT PLAN AND LONGITUDINAL SECTION

DRAWN अंकित	SUBMITTED प्रस्तुत	RECOMMENDED अनुशंसित	APPROVED अनुमोदन
Sd/- PRABHAT ASWAL	Sd/- PRABHAT ASWAL	Sd/- RAJEEV KUMAR DEM/HM	Sd/- S. CHOWDHURY

DATE दिनांक: JUL 2024 | DRG. NO. ओज संख्या: NHDB | 3BC4 | 41 | DD | 0001 | 02